


CIRCULAR GRILLE WITH GRID CORE

TYPE: CB780

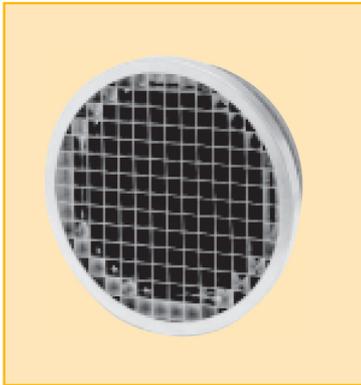


Application

The circular grille with grid core type CB780 is used for the exhaust of smaller air volumes, particularly in smaller spaces such as washrooms, toilets, bathrooms or kitchens within housing, restaurants, retail or commercial uses.

The grille can be mounted directly on a circular duct or fixed to the wall with screws. The grid core can easily be removed for cleaning.

Installation dimensions

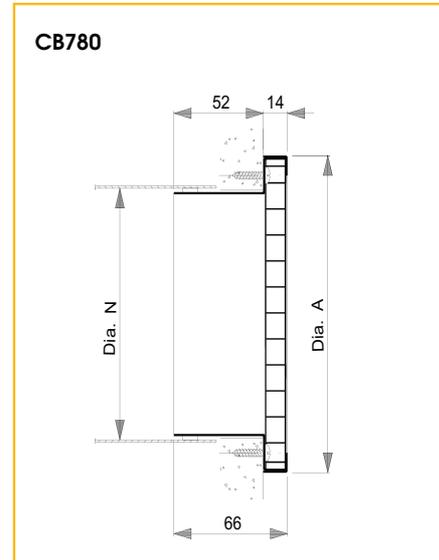

Size	Ø N	Ø A
100	100	160
125	125	160
160	160	200

Technical information

Characteristics :

- grid core with links of 12,5 x 12,5 mm
- free passage ca. 85%
- available in 3 sizes: 100, 125 and 160 mm diameter

Construction :

- frame and grid core out of mill finish aluminium
- painted in RAL colour on request
- foam sealing strip

CIRCULAR GRILLE WITH GRID CORE

TYPE: CB780

Specifications description

Example :

Circular exhaust grille with grid core (links of 12,5 x 12,5 mm) for mounting directly on a circular duct with screw fixing to wall. Standard mill finish aluminium.

Type : CB780
size mm

Fixing

The grille will push-fit into circular ducts. The grille can be secured to the wall by screw fixing through the back of the grille housing, after removing the push-fit core retaining bezel.

Selection table

Size	Δp_f (Pa)	Comfort air flow (m ³ /h)
100	8	80
125	6	160
160	7	250

Air volume corresponding to $L_w < NR30$

How to order

CB780, size 125 mm.

C	B	7	8	0	-	-	0	1	2	5	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

size