


SEMI CIRCULAR SHAPED DISPLACEMENT TERMINALS

TYPE: PIGR, OPIGR

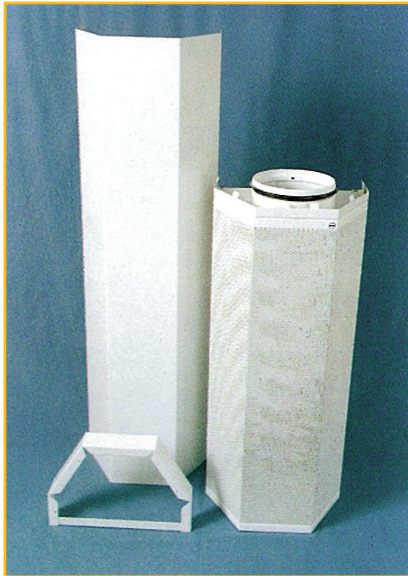

QUADRANT SHAPED UNIT PIGR, OPIGR

DESCRIPTION

Supply air for all types of premises. PIGR is made of sheet steel and powder coated in white RAL 9010. Internal air deflectors deliver even air distribution.

GENERAL DATA

Unit sizes: Ø100-Ø630.

Airflow rates: 20-2000 l/s.

Design leaving air temperature: 6°C below room air temperature. If Δt is higher, the PIGR can be equipped with an induction chamber. It is then designated IPIGR. Pressuredrop with CD30, SP approx. 70 Pa.

ACCESSORIES

Attenuator (CD), type CD30.

Damper (SP).

Duct cover (IK), to suit room height Rh.

Plinth (GS), standard height 50 mm.

Reinforced front type BUMPER.

CLEANING

Disconnect the perforated front. (Remove screws.)

Disconnect the air deflectors. (Remove screws.)

ACCESSORIES

Use SP Spread Air's separate adjustment brochure.

CLEANING

Cleaning is required when dirt has become visible on the unit. Use a damp cloth, possibly with a little dishwashing detergent.

